


LD30CNBI10BPxxIO - IO-Link



Photoelectric Time Of Flight Sensors with IO-Link communication




Description

The LD30CNBI10BPxxIO sensor family comes in a compact 10 x 30 x 20 mm ABS housing. They are designed for use in applications where high-accuracy detection as well as small size is required. Compact housing and high power LED for excellent performance-size ratio. The compact sensor design is ideally suited to confined spaces.

Benefits

- **Long range Background suppression TOF** (Time of Flight) sensor with IO-Link with a adjustable distance of 50 to 1.000 mm, either by potentiometer or via IO-Link.
- **Infrared laser class 1** assure a reliable detection.
- **Easy customization** to specific OEM requests by use of the build in IO-Link functionalities.
- **The output can be operated** either as a standard switching output or in IO-Link mode.
- **Fully configurable via output IO-Link v 1.1.** Electrical outputs can be configured as PNP / NPN / Push-Pull / External input, normally open or normally closed.
- **Timer functions** can be set, such as ON-delay, Off-delay, and one shots.
- **Logging functions:** Temperatures, detecting counter, power cycles and operating hours.
- **Detection modes** Single point, two point and windows mode.
- **Logic functions:** AND, OR, XOR and Gated SR-FF.
- **Analogue output:** In IO-Link mode the sensor will generate 16 bit analogue process data output representing the distance to the object.

 **IO-Link**



Applications

- The sensor has multiple detects functions e.g. in single point mode the presence or absence of objects are detected while cutting off the background information.
- The detection distance is very independent of the colour of the objects to be detected.
- The "analogue" distance from the sensor to the object is available via the IO-Link communication.

Main functions

- The sensor can be operated in IO-Link mode once connected to an IO-Link master or in standard I/O mode.

Adjustable parameters via IO-Link interface:

- Sensing distance and hysteresis.
- Sensing modes: single point or two point or window mode.
- Timer functions, e.g.: On-delay, Off delay, One shot leading edge or trailing edge.
- Logic functions such as: AND, OR, X-OR and SR-FF.
- External input.
- Logging functions: Maximum temperatures, minimum temperatures, operating hours, operating cycles, power cycles, minutes above maximum temperature, minutes below minimum temperature, etc.
- Auto hysteresis

References

Product selection key


 LD30CNBI10BP IO

 Enter the code option instead of

| Code | Option | Description |
|--------------------------|--------|--|
| L | - | Sensing principle: Photoelectric sensor |
| D | - | Rectangular housing |
| 30 | - | Length of housing |
| C | - | Plastic housing |
| N | - | Back trimmer |
| B | - | Diffuse reflective, Background suppression |
| I | - | infrared light |
| 10 | - | Sensing distance: 1000 mm |
| B | - | Selectable functions: NPN, PNP, Push-Pull, External Input (only pin 2) or External teach input (only pin 2) |
| P | - | Selectable: N.O. or N.C. |
| <input type="checkbox"/> | A2 | Cable, 2 m |
| | M5 | Connector M8 |
| IO | - | IO-Link version |

Type selection

| Connec- tion | Housing | Code |
|-----------------|-----------------|------------------|
| Cable | Plastic housing | LD30CNBI10BPA2IO |
| Plug | Plastic housing | LD30CNBI10BPM5IO |

Structure




Fig. 1 Cable




Fig. 2 Plug


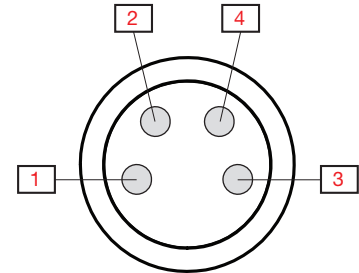


Fig. 3 "M8-plug" Pin numbers

| | | | |
|----------|--|----------|--------------------------|
| A | Sensitivity adjustment (IBack trimmer) | G | M8, 4-pin male connector |
| B | Yellow LED | 1 | Brown |
| C | Green LED | 2 | White |
| D | M3 Fixing holes for sensor mounting | 3 | Blue |
| E | Sensing window | 4 | Black |
| F | 2 m, 4 wire PVC Ø 3.3 mm cable | | |

Sensing

Detection

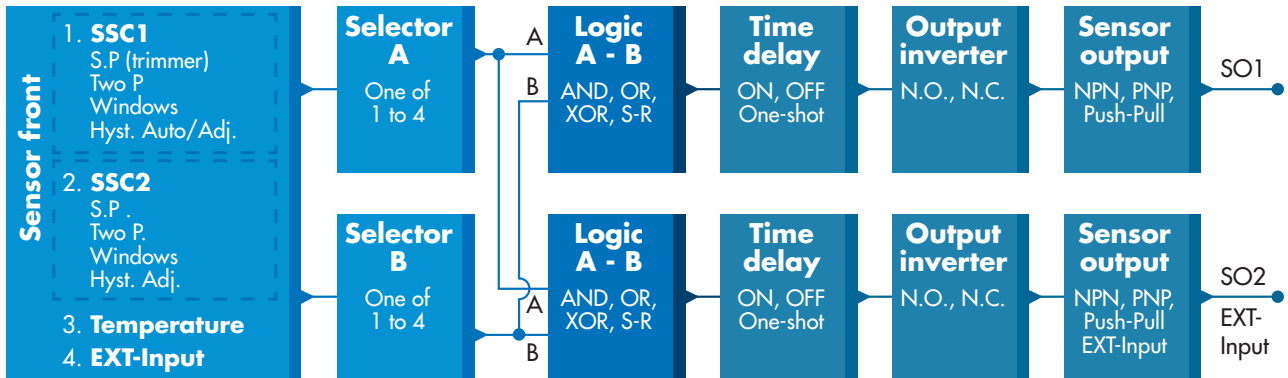




| | | |
|--|--|--|
| Sensor switching channel SSC1 and SSC2 | SSC1 <ul style="list-style-type: none"> • Enabled • Disabled Factory settings: Enabled | SSC2 <ul style="list-style-type: none"> • Enabled • Disabled Factory settings: Enabled |
| Switching mode | SSC1 <ul style="list-style-type: none"> • Deactivated • Single point mode • Two point mode • Windows mode Factory settings: Single point mode | SSC2 <ul style="list-style-type: none"> • Deactivated • Single point mode • Two point mode • Windows mode Factory settings: Single point mode |
| Rated operating distance (S_n) | 1000 mm | Reference target, white paper with 90 % reflectivity, Size 200x200 mm |
| Maximum detection distance | < 1000 mm | White object 90% reflection |
| | < 1000 mm | Grey object 18% reflection |
| | < 1000 mm | Black object 6% reflection |
| Sensitivity control | Adjustable by potentiometer, external teach or by IO-Link settings <ul style="list-style-type: none"> • Potentiometer disabled (SSC1) • Potentiometer enabled (SSC1) • External teach Factory settings: Potentiometer enabled | |
| Sensitivity adjustment | 50 mm ... 1000 mm | Single-turn potentiometer |
| | 210° | Electrical adjustment |
| | 240° | Mechanical adjustment |
| Blind zone | 0 mm | White object 90% reflection |
| | 0 mm | Grey object 18% reflection |
| | 0 mm | Black object 6% reflection |
| Light source | 940 nm | Infrared |
| Light type | Laser modulated | |
| Laser class | 1 | |
| Detection angle | ± 1.2° | @1000 mm |
| Light spot size | Ø 18 mm | @500 mm (approximation) |
| Emitter beam angle | ± 1.1° | @500 mm |
| Adjustable distance | 50-1000 mm Factory settings: SP1 1000 and SP2 750 | White object 90% reflection |
| | 50-1000 mm Factory settings: SP1 1000 and SP2 750 | Grey object 18% reflection |
| | 50-1000 mm Factory settings: SP1 1000 and SP2 750 | Black object 6% reflection |
| Hysteresis (H) Manual Automatic | Adjustable by IO-Link 5 - 2000 mm (default 50 mm) ≤10% @ S _n (On all objects) | |
| Detection filter | This function can increase the immunity towards unstable targets and electromagnetic disturbances: Value can be set from 1 to 255. Factory settings: 1 (1 is max. operating frequency and 255 is min. operating frequency) | |



Alarm settings

| | |
|--------------------------|---|
| Temperature alarm | <ul style="list-style-type: none"> • High threshold -50 to +150 °C • Low threshold -50 to +150 °C <p>Factory settings: High value 70 °C Low value -20 °C</p> |
|--------------------------|---|

Detection diagram

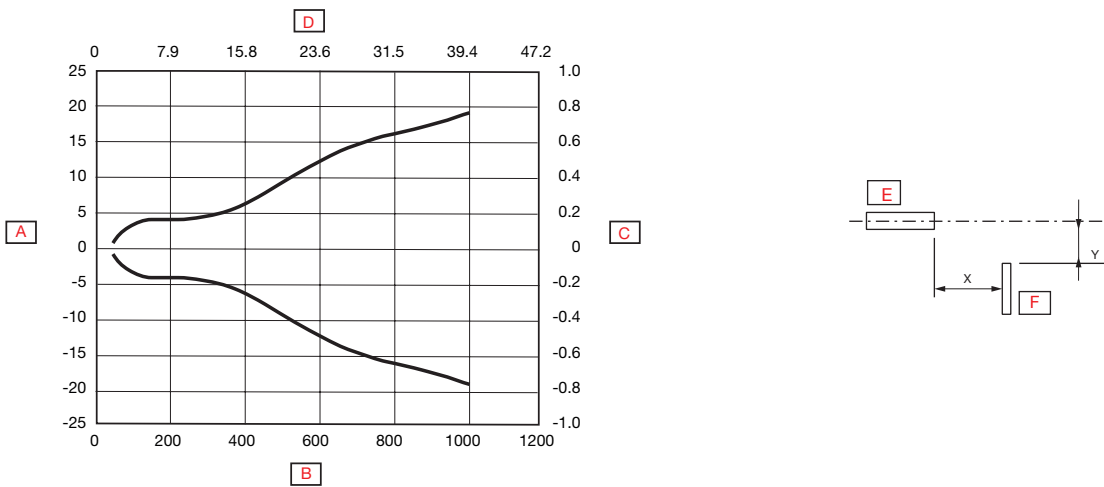


| | | | |
|----------|--------------------------|----------|------------------------------|
| A | Detection width (mm) | D | Sensing range (inches) |
| B | Sensing range (mm) | E | Sensor |
| C | Detection width (inches) | F | Object 25 x 25 mm, White 90% |

Accuracy

| | |
|--------------------------|------------|
| Temperature drift | ≤ 0.05%/°C |
|--------------------------|------------|



Sensing conditions

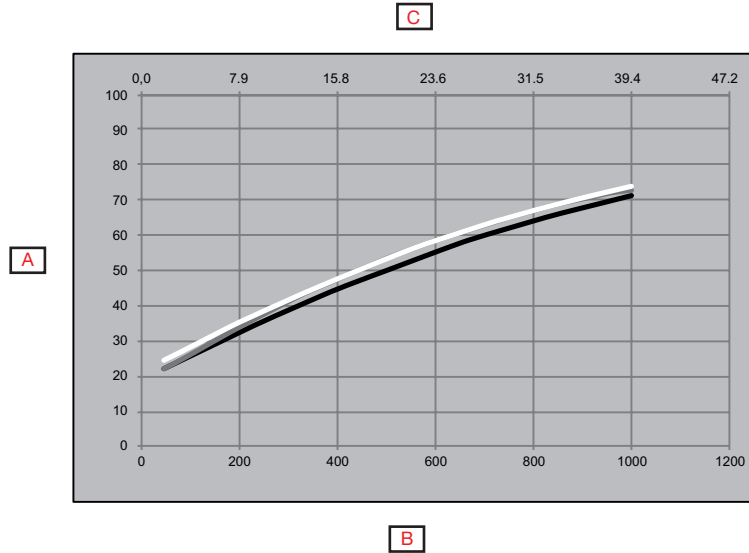

| | | | |
|----------|-------------------------------|--|--------------------------|
| A | Distance from background (mm) | | (Black on white 6%/90%) |
| B | White background 90% (mm) | | (Grey on white 18%/90%) |
| C | White background 90% (inches) | | (White on white 90%/90%) |

Features

Power Supply

| | |
|-------------------------------------|--|
| Rated operational voltage (U_B) | 10 ... 30 VDC (ripple included) |
| Ripple (U_{rpp}) | $\leq 10\%$ |
| No load supply current (I_o) | ≤ 25 mA @ U_B min. ≤ 12 mA @ U_B max. |
| Power-ON delay (t_v) | ≤ 300 ms |

Input selector

| | | |
|----------------|---|---|
| Input selector | Channel A <ul style="list-style-type: none"> • Deactivated • SSC1 • SSC2 • Temperature alarm • External input Factory settings: SSC1 | Channel B <ul style="list-style-type: none"> • Deactivated • SSC1 • SSC2 • Temperature alarm • External input Factory settings: SSC1 |
|----------------|---|---|

Logic functions

| | | |
|-----------------|---|---|
| Logic functions | Channel A + B for SO1 <ul style="list-style-type: none"> • Direct • AND • OR • X-OR • SR-FF Factory settings: Direct | Channel A + B for SO2 <ul style="list-style-type: none"> • Direct • AND • OR • X-OR • SR-FF Factory settings: Direct |
|-----------------|---|---|

Time delays

| | | |
|-------------|---|---|
| Timer mode | For SO1 <ul style="list-style-type: none"> • Disabled • Power-ON delay • Power-OFF delay • Power-ON delay and Power-OFF delay • One-shot leading edge • One-shot trailing edge Factory settings: Disabled | For SO2 <ul style="list-style-type: none"> • Disabled • Power-ON delay • Power-OFF delay • Power-ON delay and Power-OFF delay • One-shot leading edge • One-shot trailing edge Factory settings: Disabled |
| Timer scale | For SO1 <ul style="list-style-type: none"> • [ms] • [s] • [min] Factory settings: ms | For SO2 <ul style="list-style-type: none"> • [ms] • [s] • [min] Factory settings: ms |
| Timer value | For SO1 <ul style="list-style-type: none"> • 0 ... 32 767 Factory settings: 0 | For SO2 <ul style="list-style-type: none"> • 0 ... 32 767 Factory settings: 0 |

Output Inverter

| | | |
|-----------------|---|---|
| Output Inverter | For SO1 Pin 4 Black wire: <ul style="list-style-type: none"> • N.O. • N.C. Factory settings: N.O. | For SO2 Pin 2 White wire: <ul style="list-style-type: none"> • N.O. • N.C. Factory settings: N.C. |
|-----------------|---|---|

Sensor Output

| | | |
|------------------------------------|---|--|
| Switching Output Stage SO1 and SO2 | For SO1 Pin 4 Black wire: <ul style="list-style-type: none"> • NPN • PNP • Push-Pull Factory settings: PNP | For SO2 Pin 2 White wire: <ul style="list-style-type: none"> • NPN • PNP • Push-Pull • External input, active high • External input, active low • External teach Factory settings: PNP |
|------------------------------------|---|--|




Outputs

| | | |
|---------------------------------------|--|---|
| Rated operational current (I_o) | ≤ 100 mA from $-25 \dots 40^\circ\text{C}$ (SO1 + SO2) 50 mA @ $\geq 40^\circ\text{C}$ (SO1 + SO2) | |
| OFF-state current (I_o) | ≤ 100 μA | |
| Minimum operational current (I_m) | $> 0,5$ mA | |
| Voltage drop (U_d) | ≤ 1.0 VDC @ 100 mA DC | |
| Protection | Short circuit, reverse polarity, transients | |
| Utilization category | DC-12 | Control of resistive loads and solid-state loads with optical isolation |
| | DC-13 | Control of electromagnets |
| Capacitive load | 100 nF @ 100 mA | |

Operation diagram

For default factory sensor

T_v = Power-ON delay

| | | |
|---------------------|---------|--|
| Power supply | ON |  |
| Target (Object) | Present |  |
| Break output (N.C.) | ON |  |
| Make output (N.O.) | ON |  |

Response times

| | | |
|-------------------------|---------------|---------------------|
| Operating frequency (f) | ≤ 5 Hz | |
| Response times | ≤ 100 ms | OFF-ON (t_{ON}) |
| | ≤ 100 ms | ON-OFF (t_{ON}) |


Indication

| Green LED | Yellow LED | Power | Function |
|--|--|-------|---|
| SIO and IO-Link mode | | | |
| ON | ON | ON | ON (stable)* SSC1 |
| ON | OFF | ON | OFF (stable)* SSC1 |
| OFF | ON | - | ON (Not stable) SSC1 |
| OFF | OFF | - | OFF (Not stable) SSC1 |
| - | Flashing 10 Hz 50% dutycycle | ON | Output short-circuit |
| - | Flashing (0.5...20 Hz) | ON | Timer indication |
| SIO mode only | | | |
| - | Flashing 1 HZ ON 100 ms OFF 900 ms | ON | External teach by wire. Only for single point mode |
| - | Flashing 1 HZ ON 900 ms OFF 100 ms | ON | Teach time window (3 - 6 sec) |
| - | Flashing 10 HZ ON 50 ms OFF 50 ms Flashing for 2 sec | ON | Teach time out (12 sec) |
| - | Flashing 2 HZ ON 250 ms OFF 250 ms Flashing for 2 sec | ON | Teach successful |
| IO-Link mode only | | | |
| Flashing 1 HZ ON 900 ms OFF 100 ms | - | ON | Sensor is in IO-Link mode |
| Flashing 2 Hz 50% dutycycle | | ON | Find my sensor |

*See operation diagram


LED indication

| | |
|------------------------|--|
| LED indications | <ul style="list-style-type: none"> • LED Indication disabled • LED Indication enabled • Find my sensor <p>Factory settings: LED Indication enabled</p> |
|------------------------|--|


Environmental

| | | |
|---|--|-------------------------|
| Ambient temperature | -25° ... +50°C (-13°... +122°F) | Operating ¹⁾ |
| | -40° ... +70°C (-40° ... +158°F) | Storage ¹⁾ |
| Ambient light | ≤ 50 000 lux (indirect) @ <5° | @ 3000 ... 3200 °K |
| | ≤ 5 000 lux (direct) @ <5° | |
| Vibration | 10 ...150 Hz, 1.0 mm/15 g | EN 60068-2-6 |
| Shock | 30 g _n / 11 ms, 6 pos, 6 neg per axis | EN60068-2-27 |
| Drop test | 2 x 1 m and 100 x 0.5 m | EN 60068-2-31 |
| Rated insulation voltage (U_i) | 50 VDC | |
| Dielectric insulation voltage | ≥ 500 VAC rms | 50/60 Hz for 1 min. |
| Rated impulse withstand voltage | 1 kV | 1.2/50 μs |
| Pollution degree | 3 | EN60947-1 |
| Overvoltage category | III | IEC60664; EN60947-1 |
| Degree of protection | IP67 | IEC60539; EN60947-1 |
| NEMA Enclosure Types | 1 | NEMA 250 |
| Ambient humidity range | 35% ... 95% | Operating ²⁾ |
| | 35% ... 95% | Storage ²⁾ |

¹⁾ Do not bend the cable in temperatures below -10°C

²⁾ With no icing or condensation


EMC

| | | |
|---|---|---------------|
| Electrostatic discharge immunity test | ± 8 kV @ air discharge or ± 4 kV @ contact discharge | IEC 61000-4-2 |
| Radiated radio-frequency electromagnetic field immunity test (80 MHz ... 1 GHz and 1..4 GHz ... 2 GHz) | 10 V/m | IEC 61000-4-3 |
| Electrical fast transient/Burst immunity test | ±2 kV / 5 kHz using the capacitive coupling clamp | IEC 61000-4-4 |
| Conducted disturbances induced by radio-frequency fields immunity test (150 kHz ... 80 MHz) | 10 Vrms | IEC 61000-4-6 |
| Power frequency magnetic field immunity test | 30 A/m 38 μT | IEC 61000-4-8 |

Diagnostic parameters

| Function | Unit | Range |
|--|----------|---------------------|
| Values stored in the sensor (Saved every hour) | | |
| Operating Hours | [h] | 0 ... 2 147 483 647 |
| Number of Power Cycles | [cycles] | 0 ... 2 147 483 647 |
| Maximum temperature - All time high | [°C] | -50 ... +150 |
| Minimum temperature - All time low | [°C] | -50 ... +150 |
| Detection counter SSC1 | [cycles] | 0 ... 2 147 483 647 |
| Minutes above Maximum Temperature | [min] | 0 ... 2 147 483 647 |
| Minutes below Minimum Temperature | [min] | 0 ... 2 147 483 647 |
| Values stored in the sensor (Saved with events) | | |
| Download counter | [counts] | 0 ... 65 536 |
| Values not saved in sensor | | |
| Maximum temperature - Since last power-up | [°C] | -50 ... +150 |
| Minimum temperature - Since last power-up | [°C] | -50 ... +150 |
| Current temperature | [°C] | -50 ... +150 |

Events Configuration

| Events | Factory default setting |
|-------------------------|-------------------------|
| Temperature fault event | Inactive |
| Temperature over-run | Inactive |
| Temperature under-run | Inactive |
| Short circuit | Inactive |

Process data configuration

| Process Data | Factory default setting |
|----------------------------------|-------------------------|
| Analogue value | Active |
| SO1, Switching output 1 | Active |
| SO2, Switching output 2 | Active |
| SSC1, Sensor switching channel 1 | Inactive |
| SSC2, Sensor switching channel 2 | Inactive |
| TA, Temperature alarm | Inactive |
| SC, Short circuit | Inactive |

Process data structure

4 Bytes, Analogue value 16 ... 31 (16 bit)



| | | | | | | | | |
|--------|------------|----|----|----|-----------|-----------|-------------|-------------|
| Byte 0 | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 |
| | MSB | - | - | - | - | - | - | - |
| Byte 1 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| | - | - | - | - | - | - | - | LSB |
| Byte 2 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | - | - | - | - | SC | TA | SSC2 | SSC1 |
| Byte 3 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | - | - | - | - | - | - | SO2 | SO1 |

Mechanics/electronics

Connection

| | |
|--------------|---|
| Cable | 2 m, 4-wire 4 x 0.14 mm ² , Ø = 3.3 mm, PVC, Black |
| Plug | M8, 4-pin, male |

Wiring

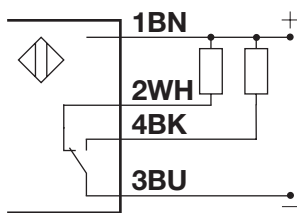


Fig. 4 NPN

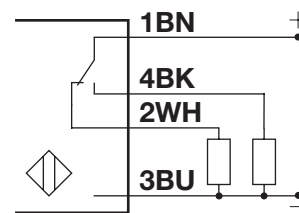


Fig. 5 PNP

| BN | WH | BK | BU |
|-------|-------|-------|------|
| Brown | White | Black | Blue |

Housing

| | | |
|----------------------|-------------------|---------------|
| Body | ABS | |
| Front glass | PMMA, Red | |
| Trimmer shaft | POM, Grey | |
| Indication | TPU, Transparent | |
| Sealing | NBR70 | |
| Dimensions | 10.8 x 30 x 20 mm | |
| Weight | ≤ 50 g | Cable version |
| | ≤ 20 g | Plug version |

Dimensions

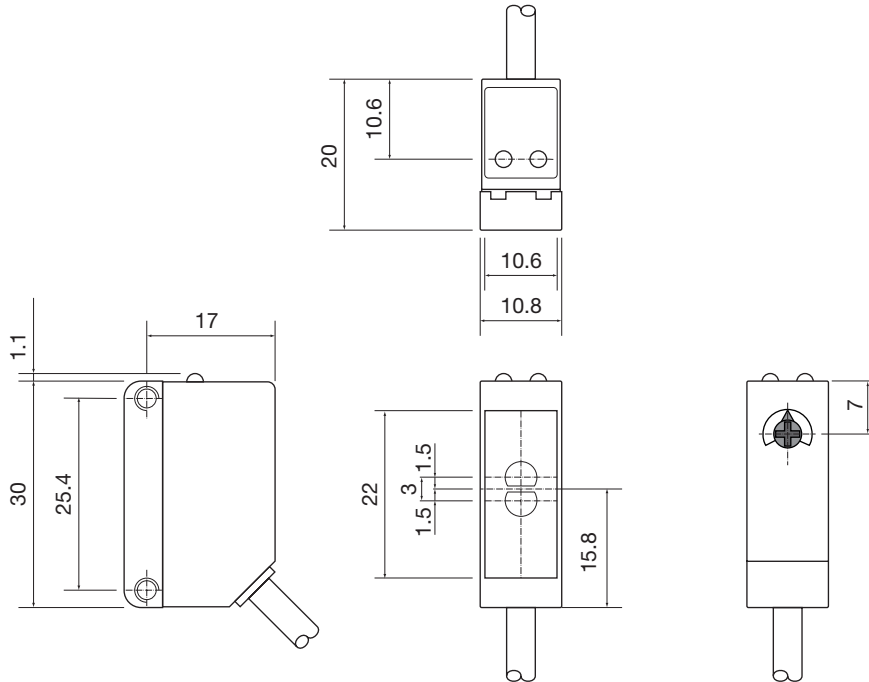


Fig. 6 Cable

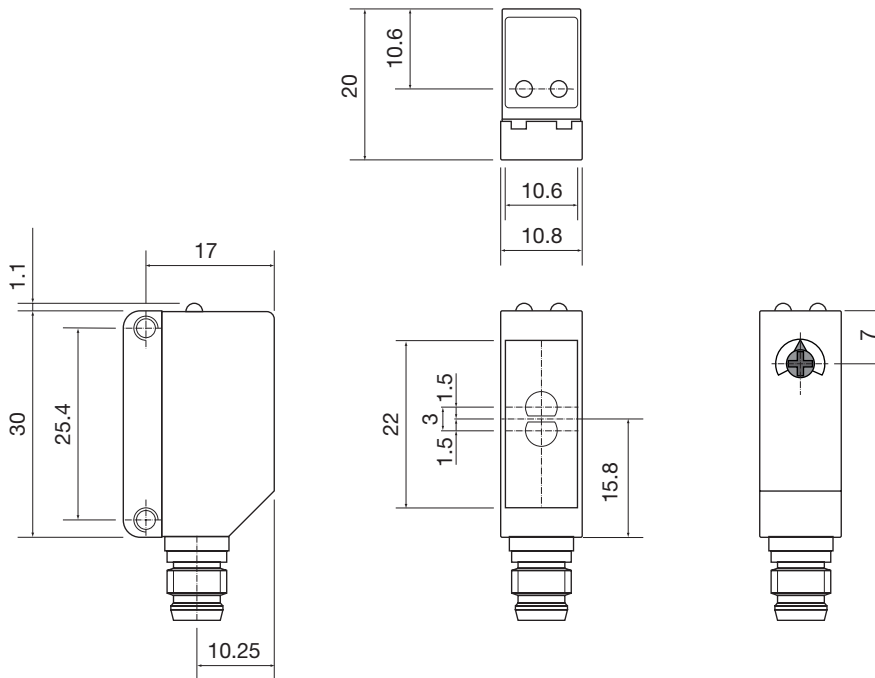





Fig. 7 Plug

Compatibility and conformity

Approvals and markings

| | | |
|--------------------------|---|---|
| General reference | Sensor designed according to EN60947-5-2 | |
| MTTF_d | 132.2 years @ 40°C (+104°F) | ISO 13849-1, SN 29500 |
| CE-marking |  | |
| Approvals |  (UL508 + C22.2) | |
| Other Approvals |  | Class 1 laser according to IEC 60825-1:2014 Complies with IEC / EN 60825-1:2014 and 21 CFR 1040.10 1040.11 except for deviations pursuant to Laser Notice No. 56, dated January 19, 2018 |

IO-Link

| | |
|-------------------------------|--|
| IO-Link revision | 1.1 |
| Transmission rate | COM2 (38.4 kbaud) |
| SDCI-Norm | IEC 61131-9 |
| Profile | Smart sensor profile 2nd edition, common profile |
| Min. cycle time | 5 ms |
| SIO mode | Yes |
| Min. master port class | A (4-pin) |
| Process data length | 32 bit |



Delivery contents and accessories




Delivery contents

- Photoelectric switch: LD30CNBI10BPxxIO
- Screwdriver
- Packaging: Carton box

Accessories

- Mounting bracket: APD30-MB2 to be purchased separately
- Connector type: CON.54NF.. series to be purchased separately

Further information

| Information | Where to find it | QR |
|-------------------|---|---|
| IO-Link manual | http://cga.pub/?c0e592 |  |
| Mounting brackets | http://cga.pub/?6fa29a |  |
| Connectors | http://cga.pub/?ed457b |  |



COPYRIGHT ©2020
Content subject to change. Download the PDF: www.gavazziautomation.com