

MAIN FEATURES

Explosion proof encoder for applications within hazardous areas.

- Optical sensor technology (OptoASIC + gears)
- Resolution up to 27 bit (13 bit single turn (8192 ppr) + 14 bit multiturn (16384 turns))
- Power supply up to +28 V DC with SSI as electrical interface
- Cable output
- Solid shaft diameter up to 10 mm
- Mounting with synchronous or centering square flange

EX CLASSIFICATION

It has been assured with EC-TYPE Examination Certificate CESI 04 ATEX 082 that the EAMX 80 comply with essential health and safety requirements according to


- EN 60079-0:2012+A11:2013
- EN 60079-1:2014
- EN 60079-31:2014

The UE declaration is available on www.eltra.it





| ORDERING CODE | EAMX | 80A | 4096 / 4096 | G | 8/28 | S | X | X | 10 | X | 3 | PR | .XXX | |
|---|-------------|---|--|-------------------------------------|------------------------------------|--------------------------------------|---|--------------------------------|---------------------------------|-----------------------------|----------------------------------|---------------------------------------|---|----------------------------------|
| SERIES multiturn absolute explosion proof encoder | EAMX | MODEL synchronous flange ø 40 mm centering square flange ø 40 mm | MULTITURN RESOLUTION (powers of 2) turns from 2 to | SINGLETURN RESOLUTION ppr | CODE TYPE binary gray | POWER SUPPLY 8 ... 28 V DC | ELECTRICAL INTERFACE Serial Synchronous Interface - SSI | LOGIC to be reported | OPTION to be reported | SHAFT DIAMETER mm | ENCLOSURE RATING IP 65 | MAX ROTATION SPEED 3000 rpm | OUTPUT TYPE radial cable (standard length 1,5 m) preferred cable lengths 2 / 3 / 5 / 10 m, to be added after OUTPUT TYPE (eg. PR5) | VARIANT custom version |

80 A

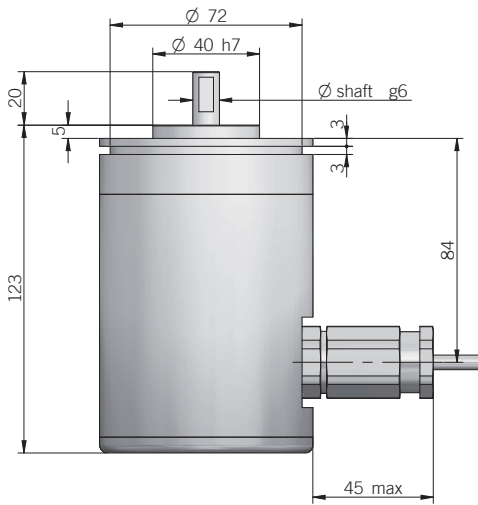

fixing clamps not included, please refer to Accessories

80 D

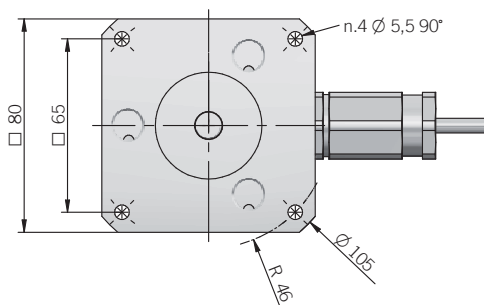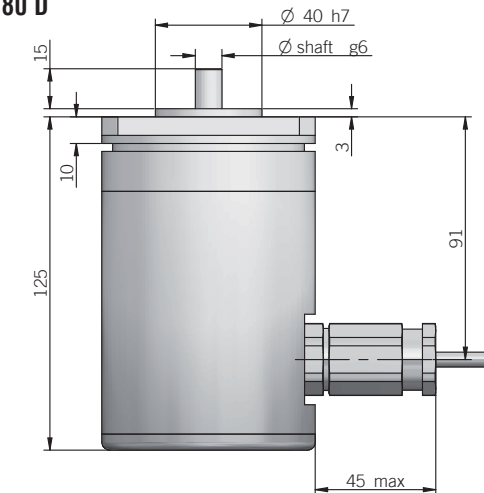

recommended mating shaft tolerance H7
dimensions in mm

ELECTRICAL SPECIFICATIONS

| | |
|---|---|
| Multiturn resolution | from 2 to 16384 turns |
| Singleturn resolution | 4096 / 8192 ppr |
| Power supply¹ | 7,6 ... 29,4 V DC (reverse polarity protection) |
| Current consumption without load | 100 mA |
| Max load current | 20 mA / channel |
| Electrical interface² | RS-422 compatible |
| Auxiliary input (U/D) | active high (+V DC) connect to 0 V if not used |
| Clock frequency | 100 kHz ... 1 MHz |
| SSI monostable time (Tm) | 18 μ s |
| SSI pause time (Tp) | > 35 μ s |
| SSI frame | Tree format (MSB ... LSB) up to 12 bit multiturn = length 25 bit (12MT + 13ST) 13 to 14 bit multiturn = length 27 bit (14MT + 13ST) |
| Counting direction | decreasing clockwise (shaft view) |
| Start-up time | 700 ms |
| Accuracy | $\pm 1/2$ LSB |
| Electromagnetic compatibility | according to 2014/30/EU directive |
| RoHS | according to 2011/65/EU directive |
| UL / CSA | certificate n. E212495 |

MECHANICAL SPECIFICATIONS

| | |
|--|--|
| Shaft diameter | $\varnothing 10$ mm |
| Enclosure rating | IP 65 (IEC 60529) |
| Max rotation speed | 3000 rpm |
| Max shaft load³ | 200 N axial / radial |
| Shock | 50 G, 11 ms (IEC 60068-2-27) |
| Vibration | 10 G, 10 ... 2000 Hz (IEC 60068-2-6) |
| Moment of inertia | $1,5 \times 10^{-6}$ kgm ² (36×10^{-6} lbf ²) |
| Starting torque (at +20°C / +68°F) | < 0,06 Nm (8,50 Ozin) |
| Bearing stage material | anodized aluminum |
| Shaft material | 1.4305 / AISI 303 stainless steel |
| Housing material | anodized aluminum |
| Bearings | n.2 ball bearings |
| Bearings life | 10^9 revolutions |
| Operating temperature^{4,5} | 0° ... +50°C (+32° ... +122°F) |
| Storage temperature^{4,5} | -15° ... +70°C (+5° ... +158°F) |
| Weight | 1200 g (42,33 oz) |

¹ as measured at the transducer without cable influences

² for further details refer to OUTPUT LEVELS on TECHNICAL BASICS section

³ maximum load for static usage

⁴ measured on the transducer flange

⁵ condensation not allowed

EPL MARKING



II 2GD
Ex db IIC T6 Gb
Ex tb IIIC T85°C Db
IP 65

II 2GD

II: group II: different than mines

2: category 2: high level of protection

GD: areas containing gas (G) and dust (D)

Ex db IIC T6 Gb

Ex db: flameproof enclosure for explosive atmospheres with gases, vapours and mists

IIC: group of gas IIC

T6: max surface temperature +85°C of the device for atmospheres with gas

Gb: product with a high level of protection

Ex tb IIIC T85°C Db

Ex tb: flameproof enclosure safety type

IIIC: group of dust combustibles IIIC

T85°C: max surface temperature +85°C of the device in the presence of dust

Db: product with a high level of protection

CONNECTIONS

| Function | Cable |
|----------|--------|
| + V DC | red |
| 0 V | grey |
| DATA + | green |
| DATA - | brown |
| CLOCK + | yellow |
| CLOCK - | pink |
| U / D | blue |
| ⏏ | shield |

