

Gas analyzers

B12 Series 2-wire Gas Transmitters

Series B12 transmitters are loop-powered instruments that transmit a 4/20 mA signal linearly proportional to gas concentration.

Operated from a 24Vdc power supply, the transmitter will drive loads up to 675 ohms, sufficient for most monitoring applications. Alternatively, the unit can operate at 12Vdc with reduced output load for applications requiring battery operation.

Transmitters are normally supplied with the sensor close coupled to the enclosure.

However, for special application, the unit can be supplied with separate sensor that can be located up to 25 feet from the transmitter.

The suggested controller is the model BC 7635.



GS 1214.01 Ozone transmitter

Complete with O₃ sensor

Scale: 0/1 PPM


0012.000002

O₃ spare sensor

Accessories

0012.000118 Calibration adapter

Gas	Standard Range	Minimum Range	Maximum Range
Ammonia	0/100 PPM	0/100 PPM	0/500 PPM
Carbon Monoxide	0/100 PPM	0/100 PPM	0/500 PPM
Hydrogen	0/4 %	0/2000 PPM	0/10 %
Nitric Oxide	0/100 PPM	0/50 PPM	0/250 PPM
Phosgene	0/2 PPM	0/2 PPM	0/10 PPM
Bromine	0/2 PPM	0/1 PPM	0/5 PPM
Chlorine	0/10 PPM	0/5 PPM	0/50 PPM
Chlorine Dioxide	0/2 PPM	0/1 PPM	0/5 PPM
Fluorine	0/2 PPM	0/1 PPM	0/5 PPM
Iodine	0/2 PPM	0/1 PPM	0/5 PPM
Ozone	0/2 PPM	0/1 PPM	0/5 PPM
Oxygen	0/25 %	0/5 %	0/35 %
Hydrogen Peroxide	0/10 PPM	0/10 PPM	0/50 PPM
Hydrogen Chloride	0/20 PPM	0/10 PPM	0/50 PPM
Hydrogen Cyanide	0/20 PPM	0/10 PPM	0/50 PPM
Hydrogen Fluoride	0/20 PPM	0/10 PPM	0/50 PPM
Hydrogen Sulfide	0/50 PPM	0/25 PPM	0/250 PPM
Nitrogen Dioxide	0/20 PPM	0/10 PPM	0/50 PPM
Sulfur Dioxide	0/20 PPM	0/10 PPM	0/50 PPM
Arsine	0/1000 PPB	0/1000 PPB	0/5000 PPB
Diborane	0/1000 PPB	0/1000 PPB	0/5000 PPB
Germane	0/1000 PPB	0/1000 PPB	0/5000 PPB
Hydrogen Selenide	0/1000 PPB	0/1000 PPB	0/5000 PPB
Phosphine	0/1000 PPB	0/1000 PPB	0/5000 PPB
Silane	0/10 PPM	0/10 PPM	0/50 PPM
Combustible gas	0/100 % LEL	0/50 % LEL	0/100 % LEL

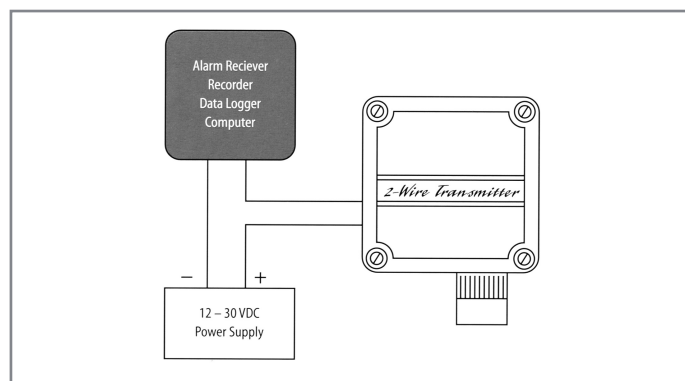

Technical Specifications

Gas type: Customer selected from the sensor list

Accuracy: Generally $\pm 5\%$ of value, but limited by available calibration gas accuracy

Repeatability: $\pm 1\%$ of full scale (electronics)

Linearity: $\pm 0.5\%$ of full scale (electronics)

Zero drift: Sensor dependent, but generally less than 2% of full scale per month, non-cumulative

Span drift: Application dependent, but generally less than 3% per month

Output: Loop powered 4/20 mA, 675 ohm max. at 24Vdc

Power: 12/30Vdc

Enclosure: NEMA 4X Polystyrene

Controls: Zero and Span internal potentiometers

Operating Temperature: -30/+55 °C (Oxygen -10/+55 °C)

Pressure limits: 0.5/2 bar

Weight: 120 g

Option: 3 digit LCD display

The technical specifications could be changed without notice.