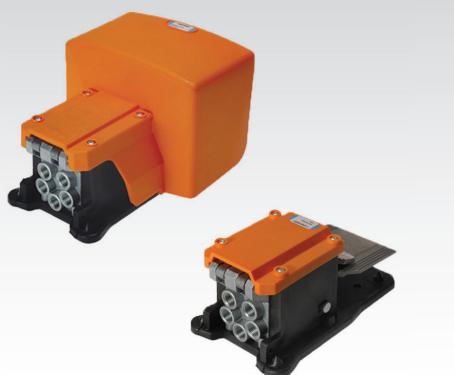


CHARACTERISTICS




Ambient temperature	-10 ÷ +70 °C	
Fluid	filtered air 50 µm, with or without lubrication	
Commutation system	poppet	
Max pressure	10 bar	
Connections	G1/8	G1/4
Nominal bore (mm)	2,3	8
Nominal flow rate (NL/min)	98	800
PNEUMATIC FOOT VALVE:		
Valve body	zamak	
Foot valve lever	aluminium	
Pedal body and protection	plastic material with reinforcing steel plate	
Seals	oil and wear resistant compound	
Spool	aluminium	
SOLENOID FOOT VALVE		
Valve body, foot valve lever, protection	dielectric plastic material	



Available ATEX version upon request

CE Ex II 2Gc IIC T5 II 2Dc T100°C




Pneumatic foot valve G1/4 with protection

	Spring return	Bistable	With safety control
	 AM-5000	 AM-5003	 AM-5015
	 AM-5001	 AM-5004	 AM-5011
	 AM-5002	 AM-5005	 AM-5012
	External operation - Spring return	External operation - bistable	External operation with safety control
	 AM-5021	 AM-5031	 AM-5041

Pneumatic foot valve G1/4 without protection

	Spring return	Bistable
	 AM-5000A	 AM-5003A
	 AM-5001A	 AM-5004A

Pneumatic foot valve G1/8 with protection

	Spring return	Solenoid foot valve
	 AM-5043	
	 AM-5043B	
	 AM-5043C	AM-5050 No electrical microswitch
	 AM-5043D	AM-5051 Electrical microswitch
		AM-5052 Double electrical microswitch

Version without protection available upon request

See ATEX Catalogue for types and versions