



Electric coils

Electric coils are windings of copper wire on nylon coils fully plasticised in synthetic resin which activate the electromagnetic actuators with which the solenoid valves are provided. Crossed by an electric current, these coils generate a magnetic field which activates the mobile core inside the actuators; the mobile core features a built-in or fixed shutter which cause the valve commutation by opening and closing their mouths.

The standard electric coils are fully plasticised with synthetic resin, tight execution, insulation class F (up to 155°C) compliant with VDE standards, with 6.3 mm 3-terminal electrical connections in compliance with EN 175301-803 (ex DIN 43650).

Protection degree: IP 54; IP 65 with connector inserted.

Tolerance permitted on the nominal voltage value: ±10%.


Tolerance permitted on the frequency value: ±5%

Room temperature: from -10 to +45°C

Fluid temperature: from -10 to +95°C



Electric absorption: 8 - 20 V.A. with AC and 6.5 - 18 W with DC.

The electric coils can be rotated 360°.

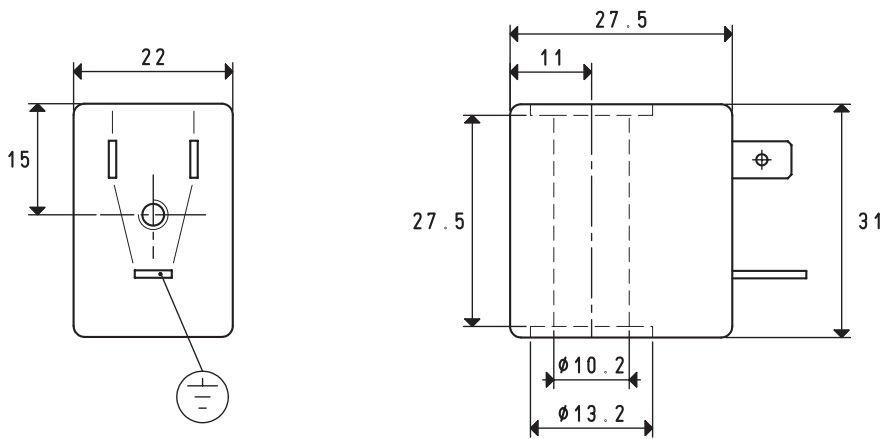

DIRECT AND ALTERNATING CURRENT COILS

Item	Service ED	Absorption	Rated voltage	Weight g	For solenoid valves item
00 07 172	100%	6,5 W	V24 DC	54	07 01 51 - 07 02 51
00 07 173	100%	8 V.A.	V24 / 50 - 60Hz	54	07 01 51 - 07 02 51

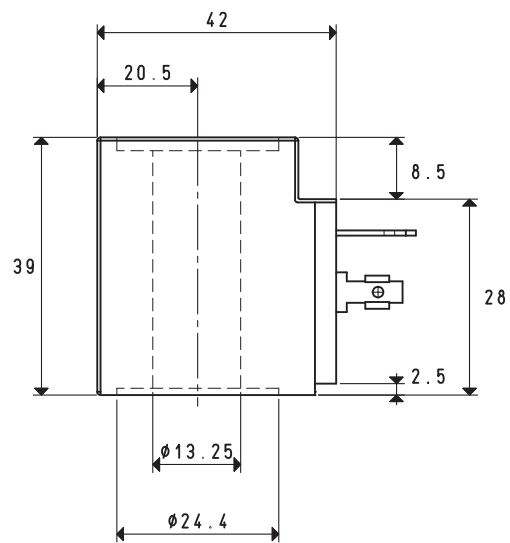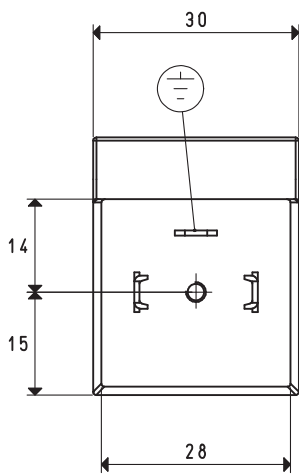

DIRECT AND ALTERNATING CURRENT COILS

Item	Service ED	Absorption	Rated voltage	Weight g
00 07 03 N	100%	18 W	V12 DC	100
00 07 04 N	100%	18 W	V24 DC	100
00 07 06 N	100%	18 W	V110 DC	100
For solenoid valves item				
07 01 11 - 07 02 11 - 07 03 11 - 07 04 11 - 07 05 11 - 07 06 11 - 07 08 11 - 07 09 11				
07 01 16 - 07 02 16 - 07 03 16				
07 01 20 - 07 02 20 - 07 03 20				
07 03 40 - 07 04 40 - 07 05 40 - 07 06 40				
07 03 51 - 07 04 51 - 07 05 51 - 07 06 51 - 07 08 51 - 07 09 51				
DDN 14				
00 07 256 N	100%	20 V.A.	V24/50 - 60 Hz	100
00 07 258 N	100%	20 V.A.	V110/50 - 60 Hz	100
00 07 259 N	100%	20 V.A.	V230/50 - 60 Hz	100
For solenoid valves item				
07 01 11 - 07 02 11 - 07 03 11 - 07 04 11 - 07 05 11 - 07 06 11 - 07 08 11 - 07 09 11				
07 01 16 - 07 02 16 - 07 03 16				
07 01 20 - 07 02 20 - 07 03 20				
07 03 40 - 07 04 40 - 07 05 40 - 07 06 40				
07 03 51 - 07 04 51 - 07 05 51 - 07 06 51 - 07 08 51 - 07 09 51				
DDN 14 - DDN 25				